


Stärker™ Specification

ASEPTIC CONTAINER

211 US/ Gallon, 800 Liter, 1.0 Bar, Single Wall
Stärker™ Specification



**CORNERSTONE
STAINLESS
CONTAINERS**

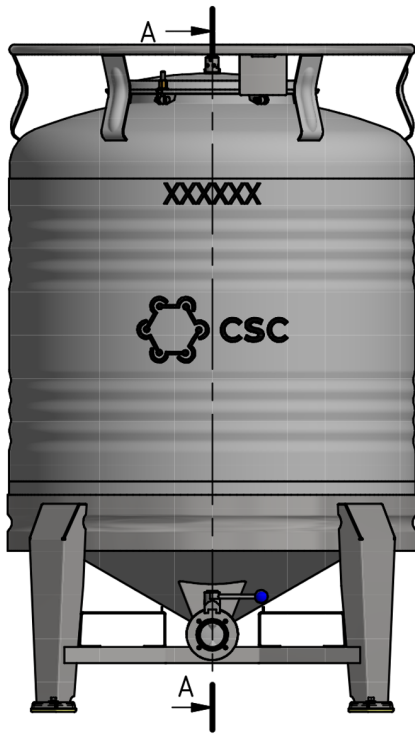

MEASUREMENT

Total Height:	1647 mm +/- 10 mm (64.84 in +/- 0.4 in)
Outer diameter of container:	1002 mm (39.45 in)
Outer diameter of pedestal ring:	1009 mm (39.73 in)
Height of outlet:	190 mm +/- 10 mm (7.48 in +/- 0.4 in)
Clearance:	120 mm +/- 5 mm (4.72 +/- 0.2 in)
Outlet Dimension:	2 1/2
Thickness of sheets:	
Stacking crown:	25 x 3 mm (0.98 x 0.12)
Top bottom:	2 mm (0.08 in)
Manway lid	3 mm (0.012 in)
Cylindrical Jacket:	2 mm (0.08 in)
Conical bottom:	2 mm (0.08 in)
Outlet Pocket:	2 mm (0.08 in)
Feet:	3 mm (0.12 in)
Forklift Tunnel:	3 mm (0.12 in)
Struts:	40 x 10 mm (1.57 x 0.39)

MATERIAL

Container parts which are in contact with the product are:
1.4301 (304 Stainless steel) 2B cold rolled.

Other Parts: 1.4301 (304 SS)

Acc. To PED 2014/68/EU, DIN EN 10028-1 and DIN EN 10028-7

Surface Quality

Inner surface (mainside), which is in contact with product acc.
To DIN EN 10021 and DIN EN 10163-2

Gaskets


Manway Gasket DN 400: Silicone

Seal Collar of Butterfly Valve: Silicone


Screwing Gaskets: Perbunan

Other Parts

Foot close with nylon cap (PA6)

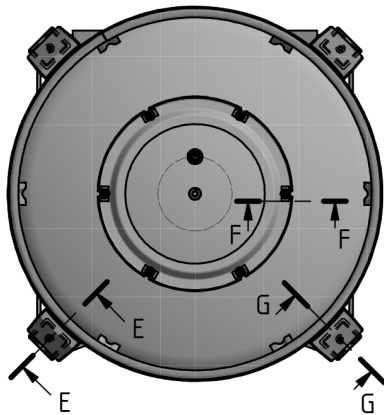

View D (1 : 10)

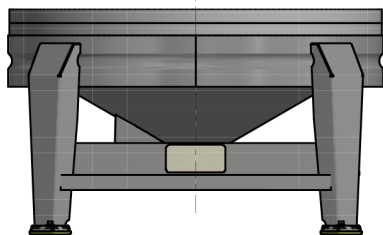

Cornerstone Stainless Containers
Address: 23515 NE Novelty Hill Rd Suite
B221-340 Redmond, WA 98053

Call: 425-686-4455

Website: www.cornerstonestainlesscontainers.com

Email: sales@cornerstonestainlesscontainers.com